



OHP 50 - 40 DGT2

Hood

FEATURES

Control Panel	Digit2
Cabinet	Double Skin
Washing Arm	2 - SuperWash
Rinse Arm	2 - PP
Full AISI 304 stainless steel wash tank for maximum hygiene and durability	•
Rinse aid Dosing	Peristaltic
Drain Pump	•
Detergent Dosing	•
Water Softener	•
Break Tank and rinse booster pump	•
CRV - Heat Recovery and Steam Condenser 0,12kW	•
Boosted Boiler 9 kW	•
Advanced LCD control panel	•
Mech/Display Interface	•
Switch	•

TECHNICAL FEATURES

External Dimensions	655x785x1500	WxDxH mm
Overall Open Door	1950	mm
Maximum Washing Height	400	mm
Clearance	430	mm
Basket Dimensions	500x500	mm
Tank Dimension	30	lt
Water Consumption	2,6	lt/Cycle
Wash Pump	0,52	kW
Tank Heater Element	3	kW
Boiler Heater Element	6	kW
Installed Power	6,52	kW
Washing Cycles	60/120/180/480	Sec
Output Cycles for Hour	60/30/20/8	Cycles/H
Power Supply	400V/3N/50Hz	
Noise	69	dBA
Weight	120	Kg
Inlet water	55/7-12	C/°f
	1,5/3	bar





ACCESSORIES

Hoses (1 per each): Water Loading/Draining, Transparent for rinse aid with dipstick

Baskets: 2x18 Plates, 1 Universal Basket, 2 Cutlery Basket



TECHNICAL DRAWINGS

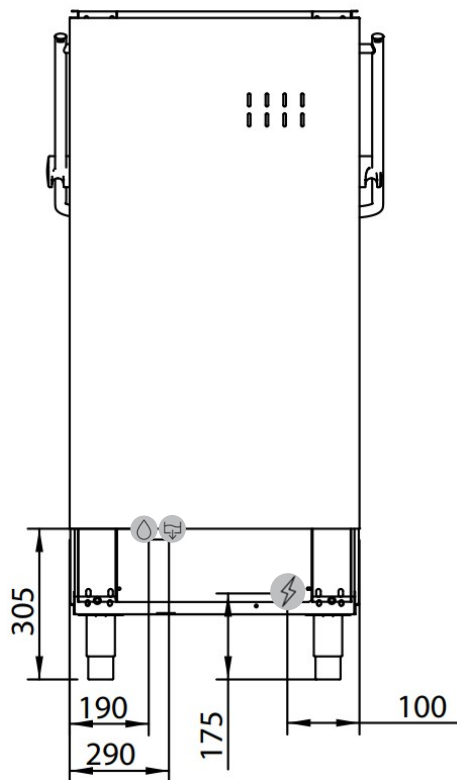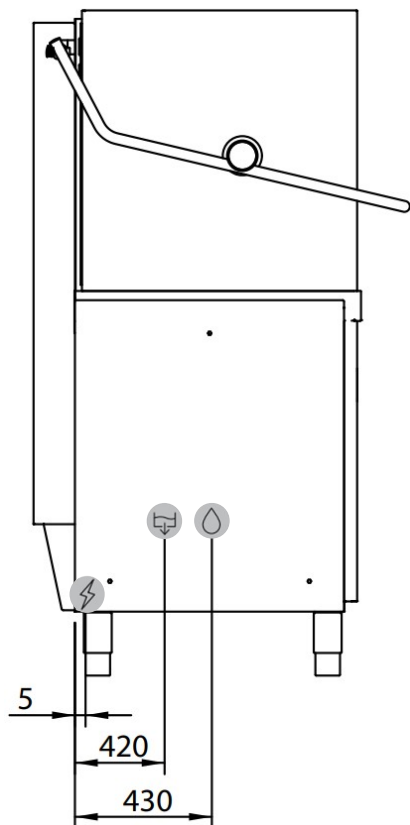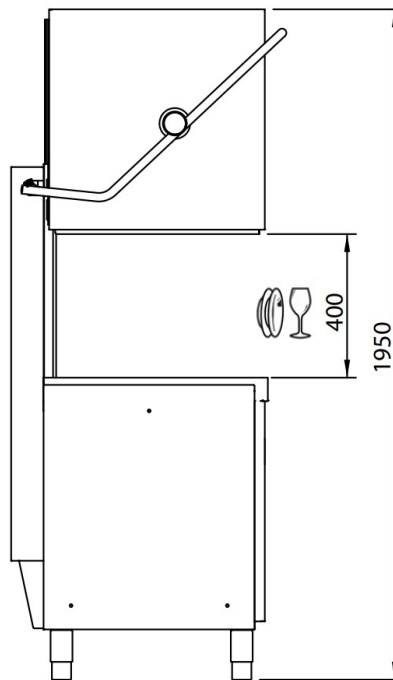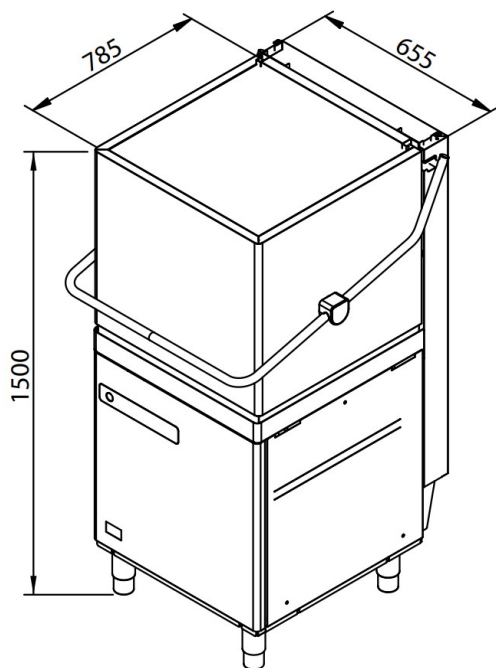

The data, information, and images contained in this document are for informational purposes only and do not constitute a contractual obligation. The company reserves the right to update them without prior notice.