



EH 50 - 40

Hood

FEATURES

Control Panel	Standard	
Cabinet	Electromechanical	
Washing Arm	Single Skin	
Rinse Arm	2 - Stainless Steel	
Full AISI 304 stainless steel wash tank for maximum hygiene and durability	2 - PP	
Rinse aid Dosing	•	
Drain Pump	Peristaltic	
Detergent Dosing		•
Water Softener		•
Break Tank and rinse booster pump		•
Boosted Boiler 9 kW		•

TECHNICAL FEATURES

External Dimensions	655x785x1480	WxDxH mm
Overall Open Door	1930	mm
Maximum Washing Height	400	mm
Clearance	430	mm
Basket Dimensions	500x500	mm
Tank Dimension	20	lt
Water Consumption	2,6	lt/Cycle
Wash Pump	0,52	kW
Tank Heater Element	3	kW
Boiler Heater Element	6	kW
Installed Power	6,52	kW
Washing Cycles	120/180	Sec
Output Cycles for Hour	30/20	Cycles/H
Power Supply	400V/3N/50Hz	
Noise	62	dBA
Weight	105	Kg
Inlet water	55/7-12	C/°f
	1,5/3	bar





ACCESSORIES

Hoses (1 per each): Water Loading/Draining, Transparent for rinse aid with dipstick

Baskets: 1x18 Plates, 1 Universal Basket, 2 Cutlery Basket



TECHNICAL DRAWINGS

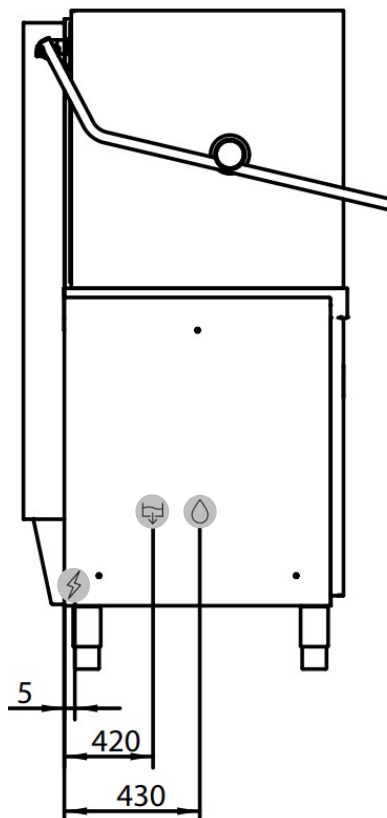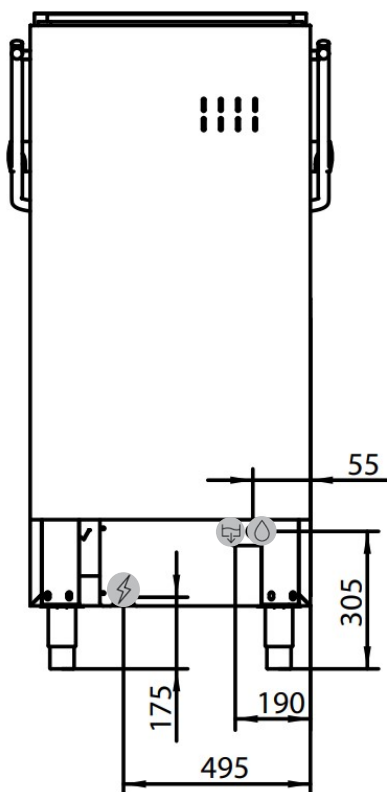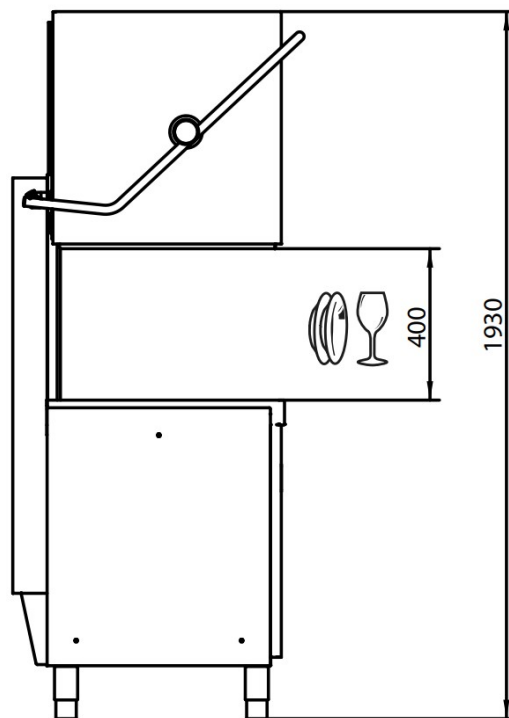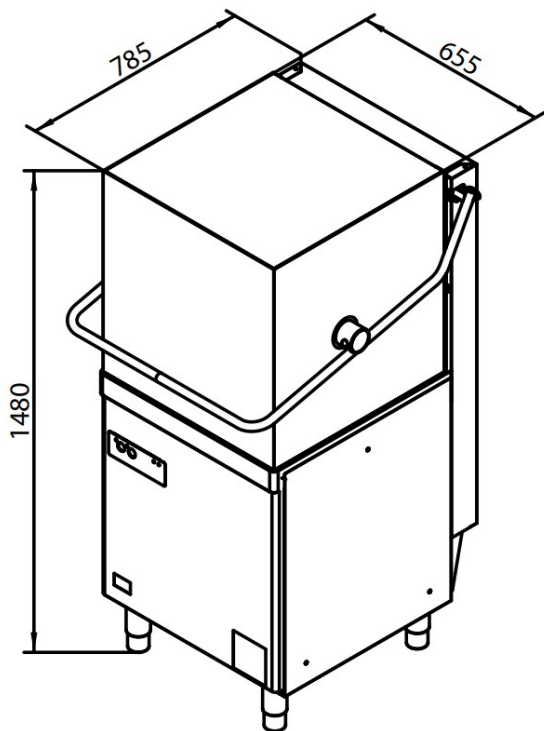

The data, information, and images contained in this document are for informational purposes only and do not constitute a contractual obligation. The company reserves the right to update them without prior notice.